


# 2019 Sprinter (907) Radio Replacement - S.O.S. Light Fix


## Light Fix

How to fix the problem of S.O.S. light illuminating after replacing the stock radio in a 2019 Sprinter with an aftermarket unit.

Written By: Eric Masek

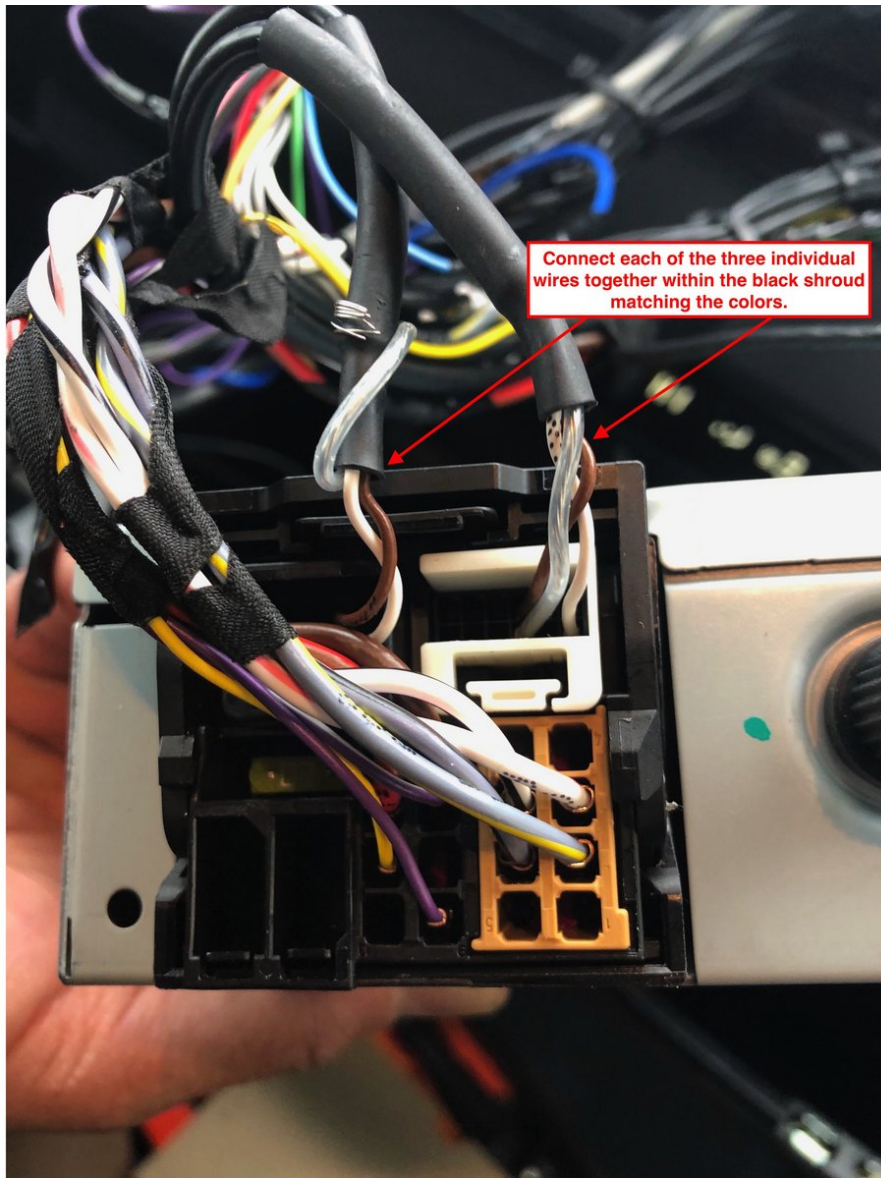

## Step 1 — 2019 Sprinter (907) Radio Replacement - S.O.S. Light Fix

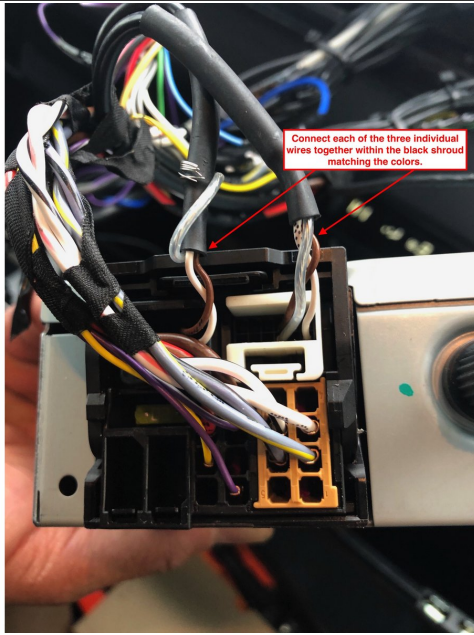

- There are 2 cables with a black casing that enter the radio harness. Each casing houses (3) wires. Those wires need to be connected together, individually, matching the colors, in order for the S.O.S. microphone to be able to continue communicating with the system without the original radio present.