




# MacBook Pro 15" Unibody Mid 2010 RAM Installation

Replace the RAM on your Mid 2010 MacBook Pro 15" Unibody.

Written By: Dozuki System

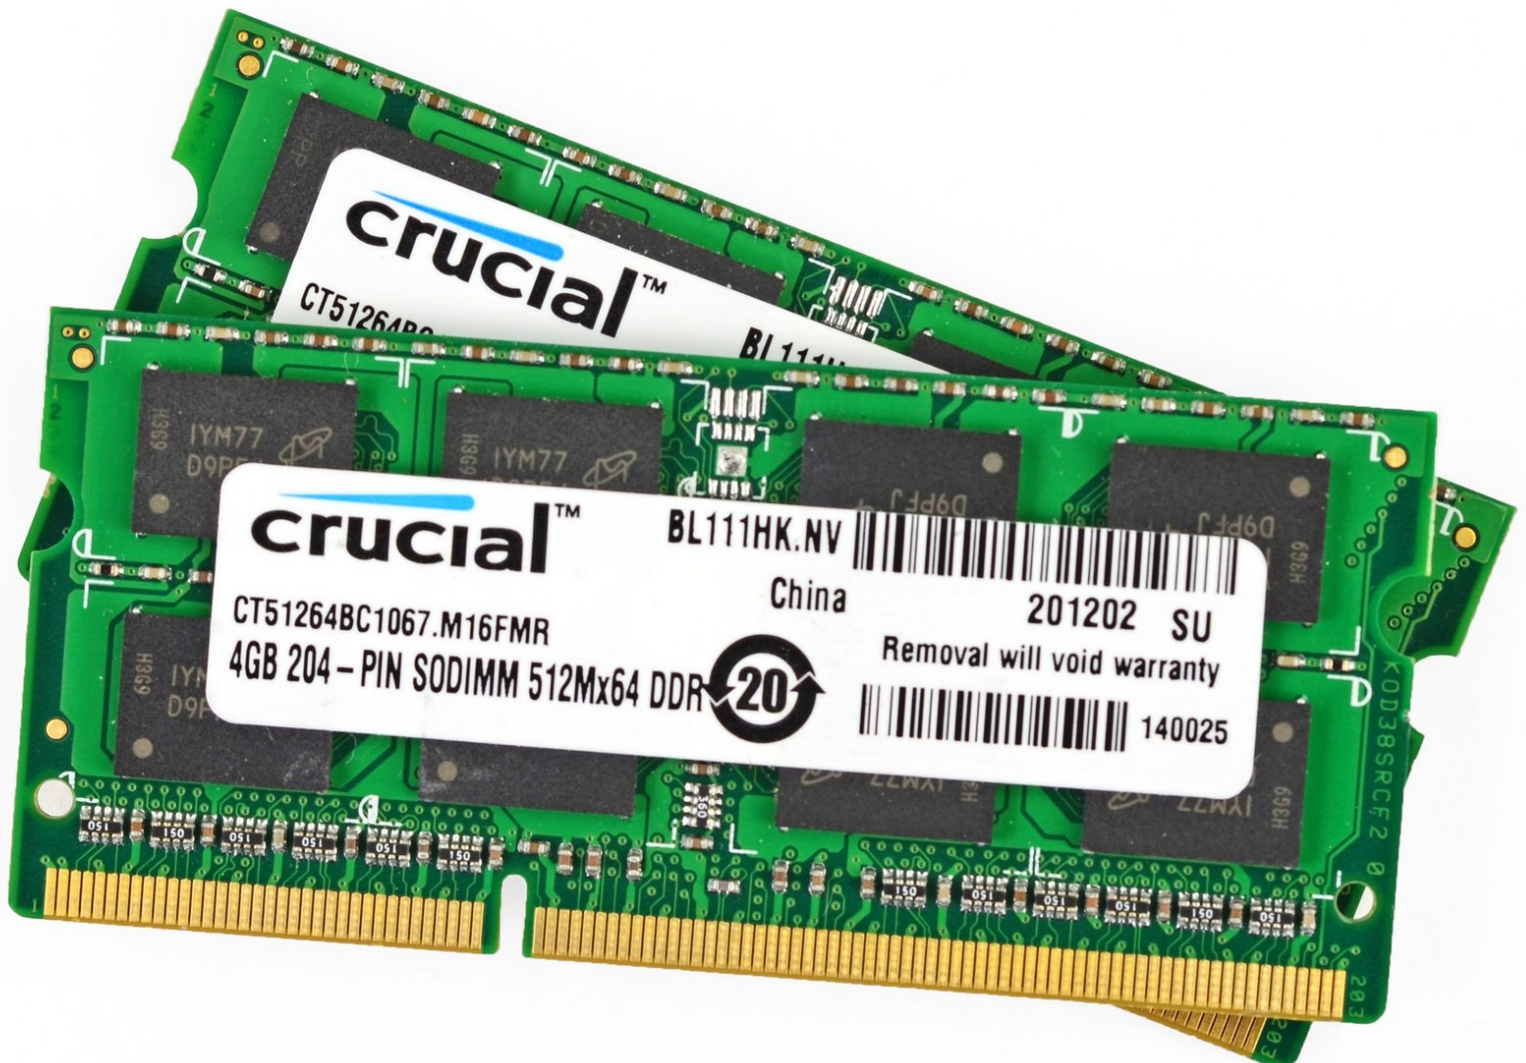

## INTRODUCTION

Accessing the RAM in this computer is straightforward and requires minimal disassembly.



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)



### PARTS:

- [RAM Upgrade Kit](#) (1)

## Step 1 — Lower Case



- Remove the following ten screws securing the lower case to the upper case:
  - Three 13.5 mm Phillips screws.
  - Seven 3 mm Phillips screws.

## Step 2



- Using both hands, lift the lower case near the vent to pop it off two clips securing it to the upper case.
- Remove the lower case and set it aside.

## Step 3 — RAM Installation



- Release the tabs on each side of the RAM module by simultaneously pushing each tab away from the RAM.
- ⓘ These tabs lock the module in place and releasing them will cause the module to "pop" up.
- After the RAM module has popped up, pull it straight out of its socket.
- ☑ Repeat this process if a second RAM module is installed.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-08 05:46:22 PM.